



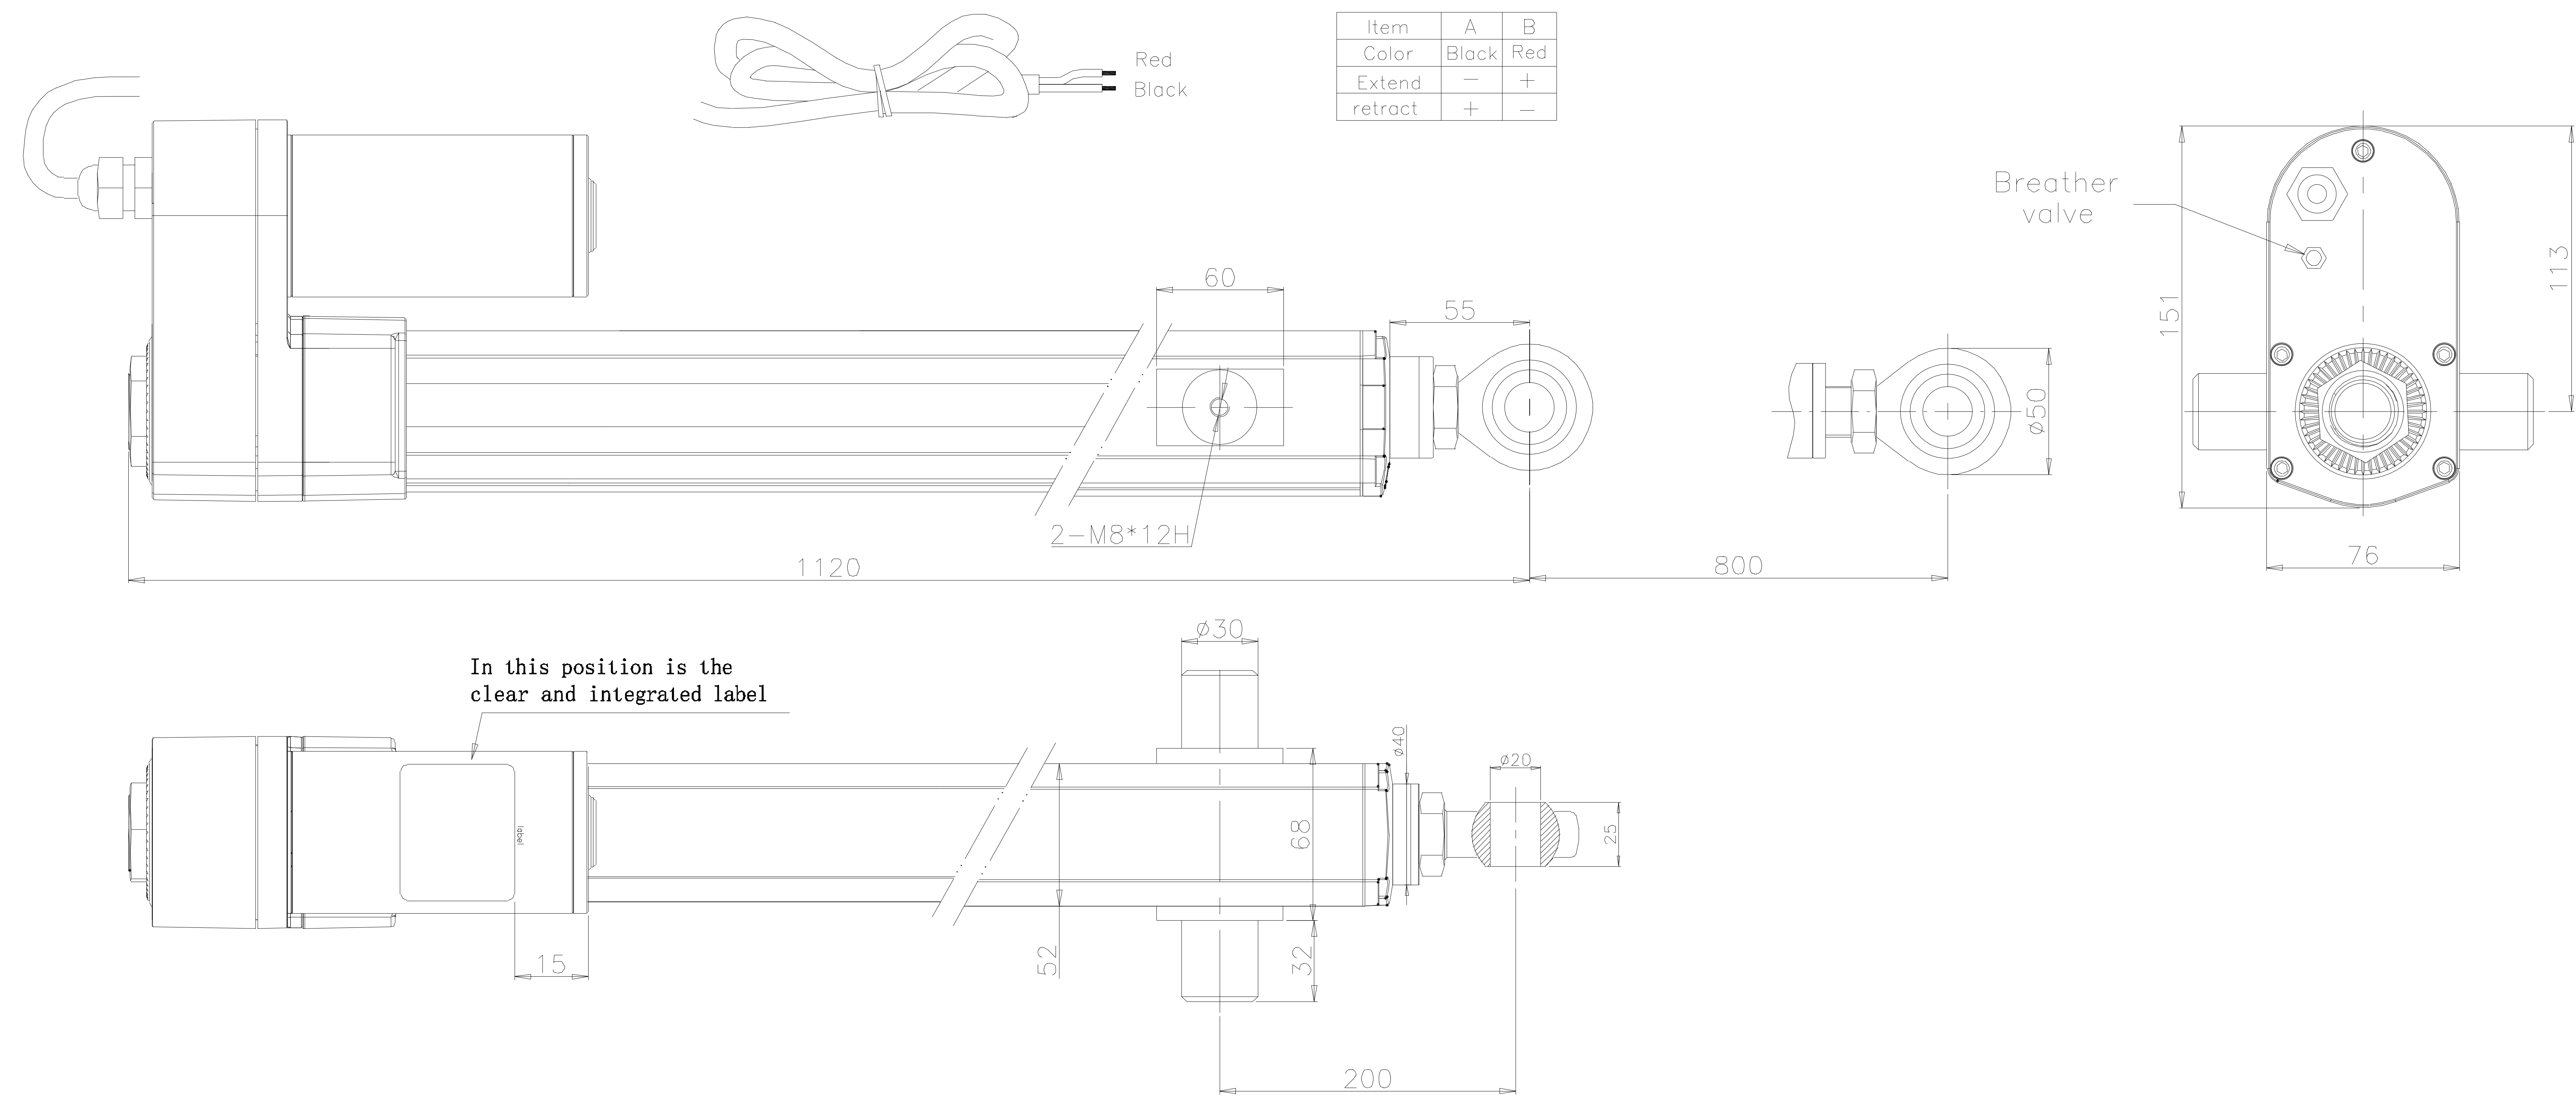

Product parameter	
Voltage	24VDC
speed at Full Load	2.2mm/s±10%
speed at No Load	2.8mm/s±10%
stroke	800±3
Install Dimension	200±3
Operating Load	15000N
Front hole	ø20Fisheye joint
rear hole	2-M8*12H
wire	14AWG-1.0M
The mass-tone attune	Black
POT / Hall	None
Limit way	Limited switches
Connector	None
IP rating	IP66
Other	

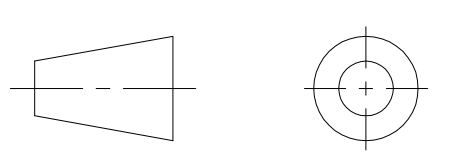

REV	DATE	REVISER	REVISER			
DESIGNED BY	2019/8/1	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.			
CHECKED BY	2019/8/1	Qindian Ying				
APPROVED BY	2019/8/1	Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Linear Actuator	
				1:4		
SYMBOLE ISO			SIZE	A3	CSD-15000-800-24	REV
			SHEET	1/1		A